



Height & tray adjustments unlock easily, yet lock into place & stay locked because of the **Wedge-Lok System**. The metal plate features wedge-cut edges that conform to the wedge-cut sections of the hardwood. When the knob is tightened, the inward tension pulls the metal plate snugly against the wood for a solid lock.



Slide Guides make angle and height adjustments on Best easels smooth. These circular graphite impregnated plastic inserts are used wherever there is a slot in the wood of the easel. This part allows for smooth movement and protects the hardwood from the metal bolt.

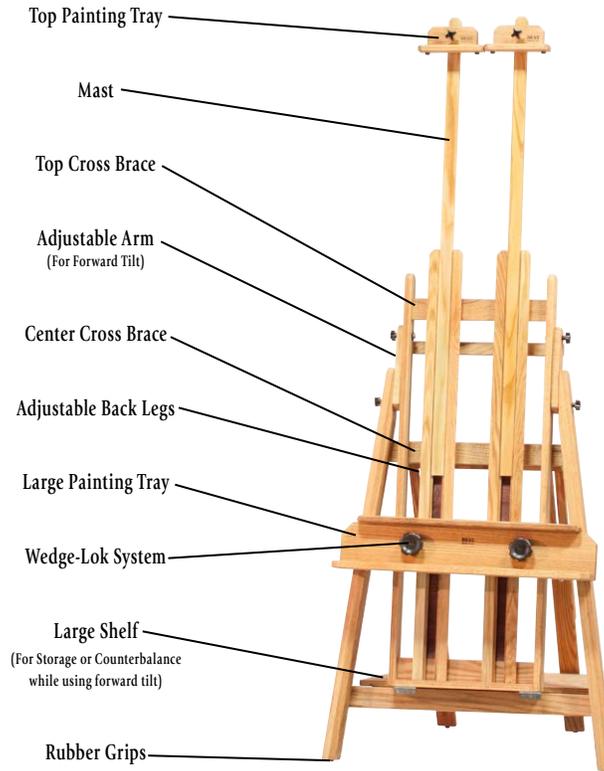

- . Will hold canvases up to 82" high
- . Adjusts quickly to a variety of angles
- . Wide painting tray features rubber grips to keep the canvas secure and 30" x 4 1/4" utility shelf
- . Unique forward tilt for pastels (Use a counter weight on back legs when used in forward position.)
- . Weight: 72 lbs.
- . Extended height: 102"
- . Compact height: 63"
- . Base width/depth: 35" x 27"
- . Assembly required
- . Ships by truck

This is an easel with an immense range for sizes. It is great for oils and acrylics and a forward tilt for pastels can be achieved with the use of a counter balance.

Easel Assembly - San Pedro Easel

- 1.) Open box. Remove painting trays and set aside. Loosen black knobs on both masts, push mast down as far as they will go, tighten black knobs. Slide easel out from underneath cardboard supports and carefully lift easel to upright position.
- 2.) Lift out of box. Loosen black knobs on back legs. Slowly open easel until shelf is flat. Tighten black knobs.
- 3.) To attach painting trays, start with large painting tray first. Loosen wedge-lok system. Start at top of masts and thread down. (If wedge-lok is too loose you may have to push metal plate in from behind easel and work past top cross bar.)
- 4.) Finish assembling easel by attaching small painting trays on each mast.
- 5.) To adjust the angle of the easel, you can use the slide-guide system on the back legs. You can also adjust forward tilt by using slide-guide system on adjustable arms.

Note: It is recommended to use a counter weight when in the forward tilt position.