




Height & tray adjustments unlock easily, yet lock into place & stay locked because of the **Wedge-lok System**. The metal plate features wedge-cut edges that conform to the wedge-cut sections of the hardwood. When the knob is tightened, the inward tension pulls the metal plate snugly against the wood for a solid lock.



Slide Guides make angle and height adjustments on Best easels smooth. These circular graphite impregnated plastic inserts are used wherever there is a slot in the wood of the easel. This part allows for smooth movement and protects the hardwood from the metal bolt.




Pulley System
Insert rope through **Pulley 1**, then through **Pulley 2**. Pull rope down through **Pulley 3**, then back up through **Pulley 2**'s hook attachment. Thread rope through hook screw on right. Wrap back around rope itself several times then knot securely.



Achieve these angles with either the **Classic Santa Fe I** or the **Classic Santa Fe II** by using the **Slide Guide System** explained in diagram above.

NOTE: Holes for **plastic casters** are pre-drilled. *If you opt to purchase rubber castors, you will need to predrill holes. Use a 3/32" drill bit.*

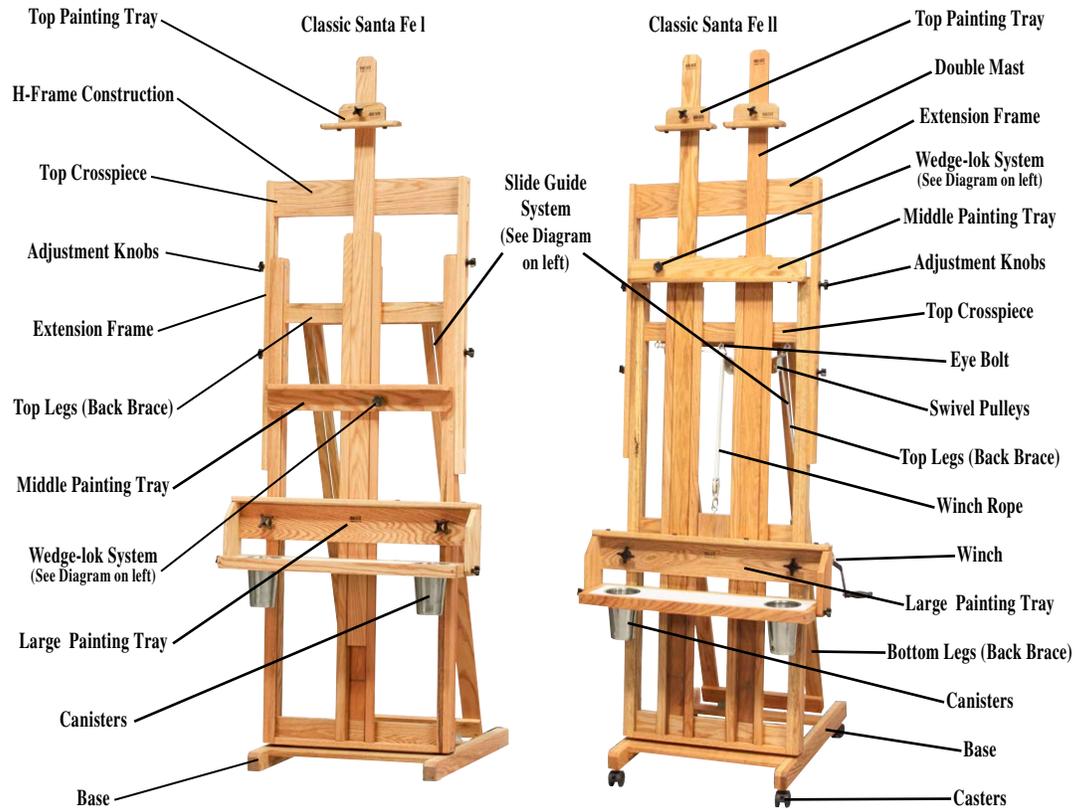

Easel Assembly - Classic Santa Fe I

- 1.) Set easel on base. Open up, tighten knobs and use the **Slide Guide System** to get easel to the desired angle.
- 2.) The Mast is packed loose in the carton. Insert into the mast channel and slide down.
- 3.) Large Paint Tray - loosen large knobs. Attach to easel by sliding down Mast then tighten black knobs. Proceed to tighten small black knobs on side for tray. Loosen the **Wedge-lok System** to adjust the Middle Paint Tray. Complete by putting in utility tray and canisters.

Easel Assembly - Classic Santa Fe II

- 1.) Repeat steps 1 & 2 from above.
- 2.) Attach winch block to easel. Start the 5 wood screws on pulley box, position over pre-drilled holes on base of easel and secure to easel by tightening screws.
- 3.) To put handle on, take large nut off, put handle on and tighten nut.
- 4.) Large paint tray - loosen large knobs. Attach to easel by sliding down Mast then tighten black knobs. Proceed to tighten small black knobs on side for tray. Loosen the **Wedge-lok System** to adjust the middle paint tray. Complete by putting in utility tray and canisters. **NOTE: Make sure black knobs on painting tray are loosened before trying to turn the winch handle.**
- 5.) To install **Pulley System**, please see diagram at left. **NOTE: To install pulley system, the painting tray must be in its lowest position (to the floor) to give the maximum movement.**