



The Elevator Bolt Locking System is used on top trays on Best easels. The 2 metal plates and round plastic guide keep the parts

parallel which allows for smoothness and ease when the tray is moved into position. By tightening the knob, the circular plate will seal itself against the mast. This means ultimate stability for the canvas.



Height & tray adjustments unlock easily, yet lock into place & stay locked because of the Wedge-lok System. The metal plate features wedge-cut


edges that conform to the wedge-cut sections of the hardwood. When the knob is tightened, the inward tension pulls the metal plate snugly against the wood for a solid lock.



Slide Guides make angle and height adjustments on Best easels smooth. These circular graphite impregnated plastic

inserts are used wherever there is a slot in the wood of the easel. This part allows for smooth movement and protects the hardwood from the metal bolt.

\*Note: **Slide Guides** on legs are used to move the main frame up, down, and to the desired angle.

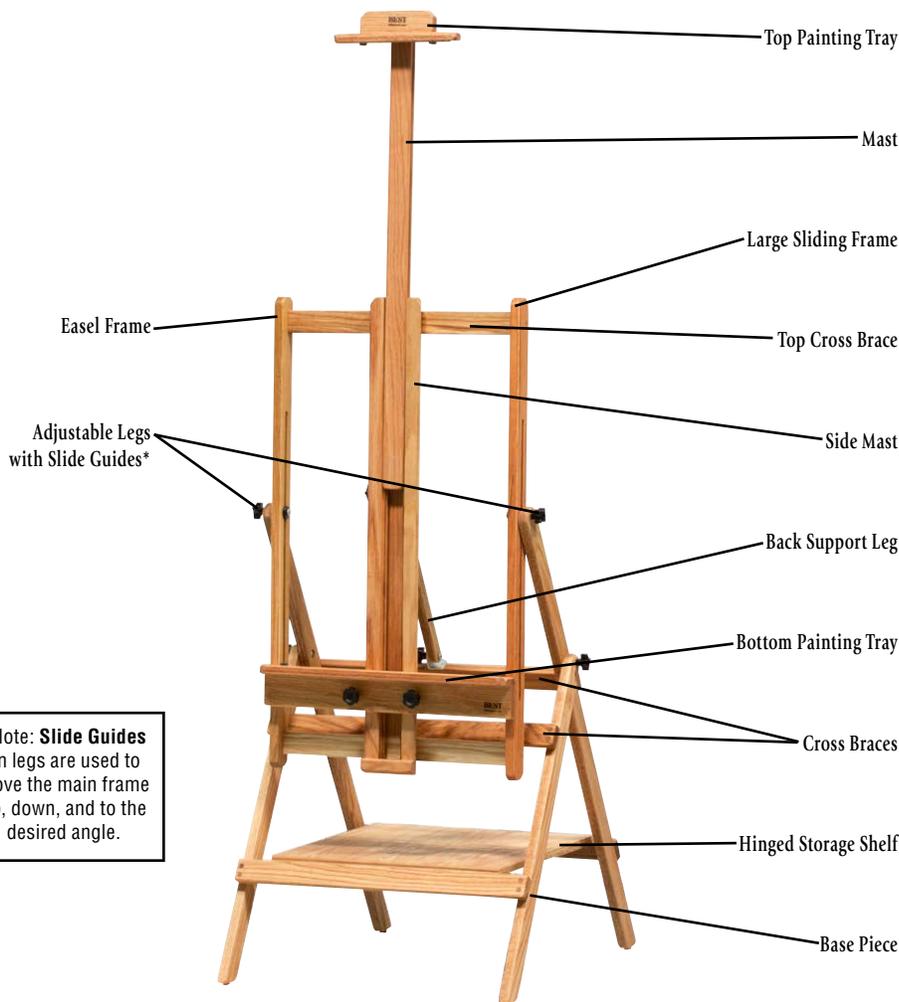

- Maximum Easel height: 100"
- Maximum canvas height: 62"
- Compact easel height: 65"
- Base (W) 24" x (D) 27"
- Bottom Painting Tray: (W) 20½" x (D) 2¼"
- Bottom Shelf: (W) 19" x (D) 18"
- Table Height: 36"
- Folds flat for storage
- Box dimensions: 55" x 29" x 6"
- Shipping weight: 35lbs.
- Ships partially assembled - UPS

### Easel Assembly - Deluxe Lobo Easel

- 1.) Take all pieces out of the box and lay out on floor.
- 2.) Open base piece and stand up. Align adjustable legs. Thread bolt from inside out through both legs. Secure with black knobs. Locate small back support leg and 1½" bolt. Attach to metal bracket on cross brace by threading bolt through leg, then bracket and attach with black knob.
- 3.) Position the center frame (assistance is recommended) between adjustable legs, thread bolt through slide-guide, position slide guide/bolt on inside of frame, thread through pre-cut slot on frame, thread through pre-drilled hole on base and secure with black knob. Repeat process on other side. Finally, take 2¼" bolt, thread through back support leg, pre-cut slot on main frame, attach slide guide and secure with black bolt. Adjust to desired height and tighten all three.
- 4.) Loosen bolt on back, take mast out entirely, turn around, reinsert and adjust to desired height and tighten.
- 5.) To attach bottom painting tray, loosen **Wedge-lok System**, slide on mast from top to desired height and tighten **Wedge-lok System**. Make sure **Wedge-lok** is tight.